



过渡接头 ADAPTER

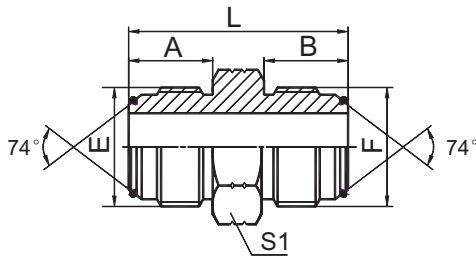

1J-OR

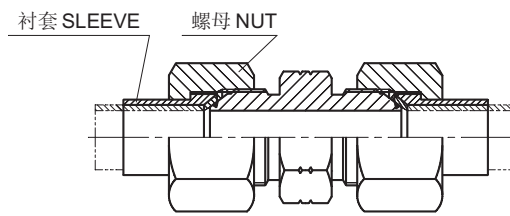

1J-OR/RN

美制 JIC 外螺纹 74° 外锥带 O-RING
JIC MALE 74° CONE WITH O-RING

代号 PART NO.	螺纹 THREAD		O 形圈 O-RING		尺寸 DIMENSIONS				
	E	F	E 端	F 端	A	B	L	S1	
1J-10OR	7/8"X14	7/8"X14	13X1	13X1	19.3	19.3	46.5	24	
1J-10-12OR	7/8"X14	1.1/16"X12	13X1	17X1	19.3	21.9	51	30	
1J-10-16OR	7/8"X14	1.5/16"X12	13X1	22X1.5	19.3	23.1	53.5	36	
1J-12OR	1.1/16"X12	1.1/16"X12	17X1	17X1	21.9	21.9	54	30	
1J-12-14OR	1.1/16"X12	1.3/16"X12	17X1	19X1.5	21.9	22.6	55.5	32	
1J-12-16OR	1.1/16"X12	1.5/16"X12	17X1	22X1.5	21.9	23.1	56	36	
1J-14OR	1.3/16"X12	1.3/16"X12	19X1.5	19X1.5	22.6	22.6	56	32	
1J-14-16OR	1.3/16"X12	1.5/16"X12	19X1.5	22X1.5	22.6	23.1	56.5	36	
1J-16OR	1.5/16"X12	1.5/16"X12	22X1.5	22X1.5	23.1	23.1	57	36	
1J-16-20OR	1.5/16"X12	1.5/8"X12	22X1.5	28X1.5	23.1	24.3	60.5	46	
1J-20OR	1.5/8"X12	1.5/8"X12	28X1.5	28X1.5	24.3	24.3	62	46	
1J-20-24OR	1.5/8"X12	1.7/8"X12	28X1.5	35X1.5	24.3	27.5	67	50	
1J-24OR	1.7/8"X12	1.7/8"X12	35X1.5	35X1.5	27.5	27.5	70	50	
1J-32OR	2.1/2"X12	2.1/2"X12	48X2	48X2	33.9	33.9	85	65	

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.